

SELF-PROPELLED SCISSOR WORKPLATFORM

Official website: <https://www.homsunlift.com>

WhatsApp/Wechat ID: +8613680275183


Email: sandy519@foxmail.com

(标准款)

GTJZ

全自行剪叉式升降平台

SELF-PROPELLED SCISSOR WORKPLATFORM

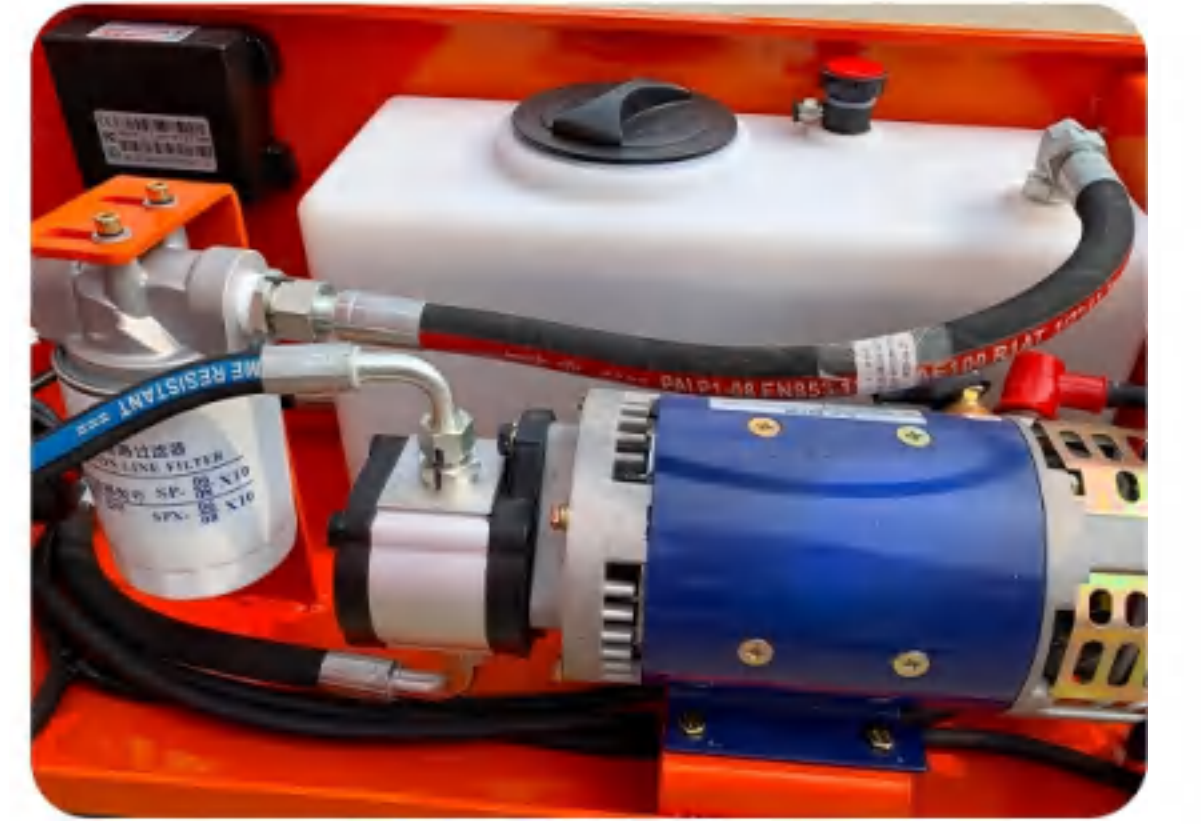

	GTJZ06	GTJZ-6(标准)	GTJZ08	GTJZ-8(标准)	GTJZ10	GTJZ12	GTJZ14
Safe working load	kg	450	320	450	320	320	230
Safe working load of the extension platform (kg)		113	113	113	113	113	113
Maximum working height (A)	m	8	8	10	10	12	15.8
Maximum platform height (B)	m	6	6	8	8	10	13.8
Platform size (width * height)	m	2.27*1.13*1.1	2.27*0.81*1.1	2.27*1.13*1.1	2.27*0.81*1.1	2.27*1.13*1.1	2.27*1.13*1.1
Overall dimensions (Length x Width x Height, Folding Guardrail)	m	2.39*1.16*1.7	2.39*0.84*1.6	2.39*1.16*1.82	2.39*0.84*1.82	2.39*1.16*1.94	2.39*1.16*2.06
整机外形尺寸 (长X宽X高, 护栏未折叠)	m	2.39*1.16*2.21	2.39*0.84*2.12	2.39*1.16*2.34	2.39*0.84*2.34	2.39*1.16*2.47	2.39*1.16*2.6
Platform extension dimension (G)	m	0.9	0.9	0.9	0.9	0.9	0.9
Minimum ground clearance (Retracted state)	m	0.1	0.1	0.1	0.1	0.1	0.1
Minimum ground clearance (Raised state)	m	0.019	0.019	0.019	0.019	0.019	0.019
wheelbase	m	2.22	2.22	2.22	2.22	2.22	2.22
Minimum turning radius (Inner wheel/Outer wheel)	m	0/2.2	0/2.2	0/2.2	0/2.2	0/2.2	0/2.2
Lifting motor/drive motor	V/Kw	24v/4.5kw	24v/4.5kw	24v/4.5kw	24v/4.5kw	24v/4.5kw	24v/4.5kw
Machine traveling speed (Retracted state)	km/h	3.5km/h	3.5km/h	3.5km/h	3.5km/h	3.5km/h	3.5km/h
Machine traveling speed (Raised state)	km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h
Ascending/descending speed	sec	95/80	95/80	95/80	95/80	95/80	95/80
storage battery	V/Ah	4×6V/200Ah	4×6V/200Ah	4×6V/200Ah	4×6V/200Ah	4×6V/200Ah	4×6V/200Ah
charger	V/A	24v/30A	24v/30A	24v/30A	24v/30A	24v/30A	24v/30A
Maximum gradeability	%	25	25	25	25	25	25
Maximum allowable working angle (Indoor/Outdoor)		2 / 3°	2°/3°	2 / 3°	2°/3°	2 / 3°	2 / 3°
tire	mm	Ø381*127	Ø381*127	Ø381*127	Ø381*127	Ø381*127	Ø381*127
Total weight	kg	2100kg	1980kg	2250kg	2050kg	2550kg	3300kg

